


## PROJECT PROFILE: FELTHAM

### PROJECT SPECIFICATIONS

Status:	<b>COMPLETED</b>
Started:	AUGUST 2021
Completed:	December 2021
Project Duration:	4 MONTHS
Client:	FIRST GROUP
Location:	FELTHAM
SVR Disciplines:	NEW DRIVERS WALKWAY DESIGN & REFLECTIVE ACOUSTIC FENCE INSTALLATION

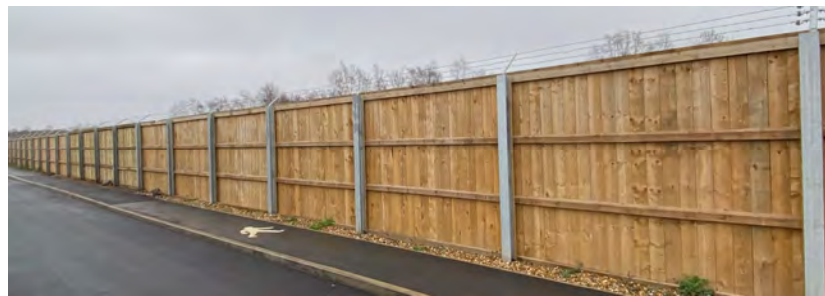

### ABOUT THE PROJECT

Sunville Rail were requested to design a Drivers Walkway for access and egress to the new depot facility and a new Reflective Acoustic Fence segregating the depot as per the AFC drawing.

### PROJECT OVERVIEW

Sunville Rail was awarded a contract to carry out works at Feltham depot and gave Sunville our first opportunity to carry out works as a principal contractor.

Sunville Rail undertaking Principal Contractor role, successfully completed :

- Site Survey and Design
- 700m of Acoustic fencing manually delivered .
- Tarmac and kerbing new depot road.
- Safety barriers for concrete aprons.
- Installation of GRP gates on driver's walkways
- Provide site safety and welfare facilities
- Delivery of materials and plant to site
- Site clearance
- Palisade fencing installation
- Troughing Route Works
- Vegetation clearance
- Installation of Vortok Fencing
- Installation of temporary Heras fencing
- Minor Civils Snagging



## PROJECT PROFILE: FELTHAM

The site location for the Acoustic Fence installation was within Feltham Train Depot and was broken down in to 3 key areas of work.

Area A (between SOP18- SOP 25): - Classed as high street environment (3m+) The work required no possessions or line blocks within the depot or main lines.

Area B (between SOP26- SOP35): - This area required a line block on the up/down arrivals to deliver materials and install fence. A SSOWP was in place to carry out the works in this area. Once a line block was granted the line could be crossed at the section gap in 3rd rail.


Area C (between SOP36 – SOP39 & SOP48): - This area of work was carried out under separated protection using site warden to maintain 2m from the up/down arrivals.

Sunville Rail managed to successfully deliver in excess of 700m of acoustic fencing to a high standard whilst working across 3 different areas which provided a number of challenging issues which we are overcome to deliver on our clients expectation.





## PROJECT PROFILE: FELTHAM

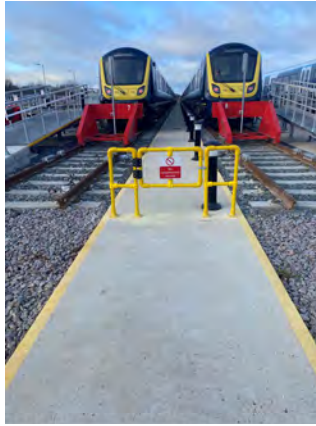

For more information please contact:

**Paul Hayes**  
Managing Director  
Sunville Rail Limited  
[paul.hayes@sunvillerrail.co.uk](mailto:paul.hayes@sunvillerrail.co.uk)

